

## Enforcer - Programming Key fobs




To enter the Master Manager Menu, Press **D** and type in your **MASTER MANAGER CODE**, (this will be at least 4 digits long).


Use the **NO** key until it scrolls to '**Change Codes**' and press the **YES** key.



To add a new code or key fob, press the **YES** key.

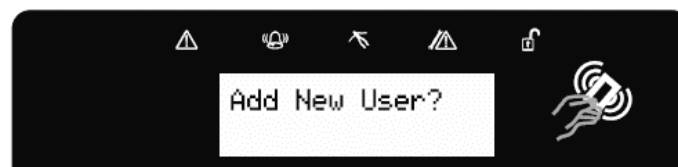

This will go to the next available free user or you can choose a user number by using the arrow keys or D. Press the **YES** key.

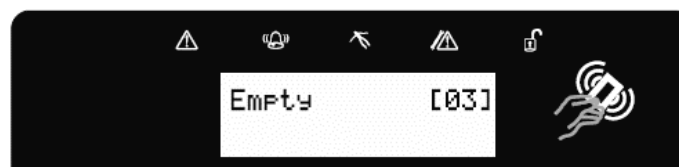


Enter the new code or present a tag until the display changes to asterisks, the tag or code will be now assigned to this user. Press the **YES** key.



Press **YES** to select the 'user' type.



Deselect the areas you do not want the user to be assigned to using the highlighted **ABCD** keys. Press the **YES** key.

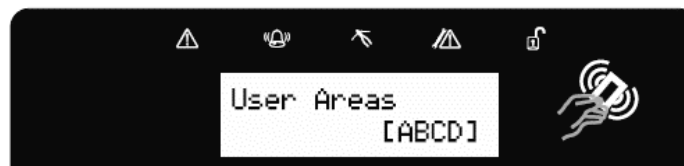

Press **YES** to be able to Unset and set the system.



Choose whether Flexi Set is to be enabled/disabled by using the **D** key. If you select **YES** this will give you the option to pick an area that you have been assigned, before you set the alarm. If you select **NO**, this will automatically set without prompting first. Press the **YES** key.



Enter the name using the buttons on the keypad, the keypad does have predictive text. Press **D** to move the cursor right, **B** to move back and **C** to delete a letter. Press the **YES** key.



From here you can add another code or key fob, or to exit press the **NO** key until **Change Codes** appears, then press **A** to save and exit.

**IF YOU REQUIRE ANY FURTHER ASSISTANCE WITH PROGRAMMING KEY FOBS, PLEASE CALL OUR TECHNICAL SUPPORT TEAM ON 0113 281 2106, WHO WILL BE ABLE TO TALK YOU THROUGH HOW TO PROGRAM YOUR FOB(S) INTO YOUR KEYPAD.**